


CABLAGGIO SCHEDA POTENZA

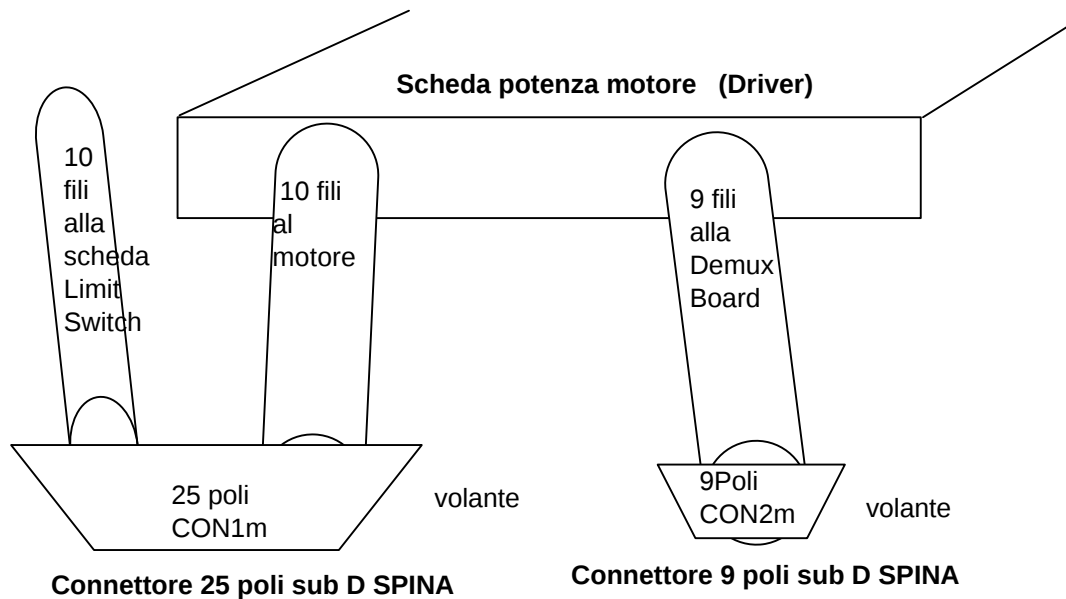

K1m	Pin	Funzione
	1	W5A (brown)
	2	W3A (pink-orange)
	3	W1A (yellow)
	4	W4E (black)
	5	W2E (red)
	6	Home2-Spare-Gnd
	7	Home2-Spare-O
	8	Home1-C
	9	Home1-Gnd
	10	Home1-O
	11	CCW-Gnd
	12	CCW-O
	13	CCW-C
	14	W4A (grey)
	15	W2A (blue)
	16	W5E (violet)
	17	W3E (green)
	18	W1E (white)
	19	Home2-Spare-C
	20	Shaft-C
	21	Shaft-Gnd
	22	Shaft-O
	23	CCW-C
	24	CCW-O
	25	CW Gnd

K2m	Pin	Funzione
	1	SAC GND (grey)
	2	Gate+ (yellow)
	3	Shutoff+ (brown)
	4	Direction+ (green)
	5	Pulse+ (blue)
	6	SAC GND (white)
	7	
	8	Motor VDC (red)
	9	Motor GND (black)

Driver

Pin	Fila c (alta-dentro)	a (bassa-fuori)
2	Pulse -	Pulse+
4	Direction-	Direction+
6	Gate-	Gate+
8	Switch relay	Current shutoff +
10	Switch relay	Switch relay
12		Current shutoff -
14		
16	Motor GND	Motor GND
18	Motor GND	Motor GND
20	W2 E red	W1 E white
22	W4 E black	W3 E green
24	W1 A red	W5 E red
26	W3 A orange(or pink)	W2 A blue
28	W5 A brown	W4 A grey
30	Motor Voltage	Motor Voltage
32	NC	NC

Configurazione in AND dell'Home1 e di Shaft

